


Waterproof Mildew Proof

SEALANT FOR BOTH INTERIOR & EXTERIOR

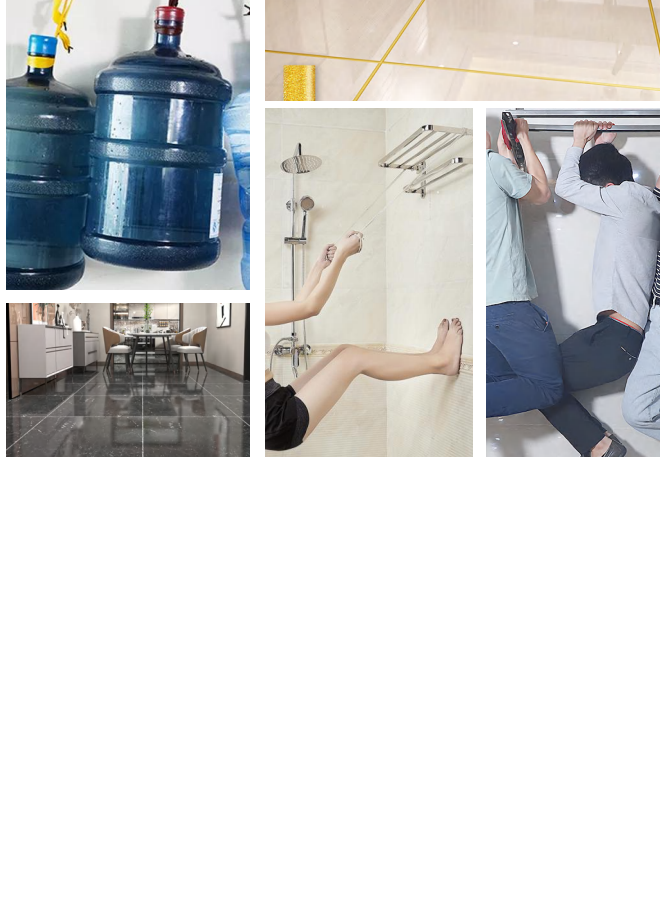

Liquid Nail Adhesive

Silicone Sealant

Structural Silicone Sealant

Epoxy Tile Grout

PU Foam

Contact Adhesive



Choose US, Choose Health!

- Low Smell**
Adopt high quality environment friendly solvent (optional original material), adopt advanced formula, remove the sticky color of traditional product, save the environmental pollution, make furniture and fixtures work more healthy.
- Environment Friendly**
Adopt environment friendly solvent (optional extraction of as major solvent), never add the highly toxic and cancer-causing solvent like benzene, ethylene dibromide.
Environment friendly index superior to the mandatory national standard GB18583-2008. All exported products pass the test of China Import & Export Inspection and Quarantine Bureau.
- Glue Saving**
Because solid content and rubber content are higher, when apply a thin layer, the layer could be seen very clearly, with even spraying, the adhesion could fulfil the requirement. One kilogram of glue could be used for 100m² (area 10-20% comparing with the same level of product in market, save much cost) one kilogram of same glue in market can save 1-1.2x.
- High Temperature Resistant**
The thermal stability and adhesion under high temperature could be stable in particular manner: ordinary glue's thermal stability around 60°C and top grade glue is up to 100°C.
- Strong Adhesion**
High solid content, average solid content is above 30%, glue content is higher than similar adhesive; bonding strength is more firm and fast, even in the application of glue failure or reworking with normal operation.
- Anti-aging**
Due to high solid content and rubber content, the aging resistant performance of the product is excellent; it is outstanding under various environment such as, extreme high or low temperature, big temperature difference, moisture environment etc., the effectiveness of adhesion for most products could last more than five years.




Liquid Nail Adhesive

Liquid Nail Adhesive

Liquid nail adhesive is a premium grade, solvent based, synthetic rubber multipurpose adhesive suitable for construction purposes. It provides a professional strength bond with exceptional holding power for a wide variety of building materials. It is tough, long lasting and moisture resistant.
Liquid nail adhesive is highly versatile, all weather adhesive. Its 100% adhesive formula provides a long lasting, heavy-duty bond. We call it All Surfaces, All Purpose. The durable, 100% waterproof formula holds up indoors and outdoors.


Material	Synthetic rubber
Color	Transparent, White, Beige
Volume	300ML, 310ML, 330ML
Shelf Life	At least 12 months when store in a cool, dry place
Curing Time	24-72 hours
Extrudability	>240 mm/min
Features	1. High strength adhesion. 2. Wide usage, suitable for most of Substrates 3. Good weather resistance, with waterproof function, 4. Excellent corrosion resistance, cold resistance 5. High temperature resistance (30°C+100°C) 6. Excellent flexibility 7. Don't sag, can cure, can paint after drying.
Application	Construction, Packing, Footwear & Leather, Woodworking, Furniture
Package	24 cartridges/carton

Colors

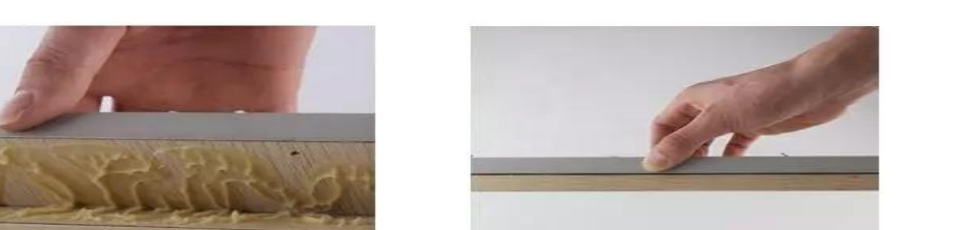

Application

- Bonding between Metal, Timber, Polyethylene, ceramic, Porcelain, Stone, Gypsum plaster board, MCF board, Galvanized Iron, Plastic (metal, Aluminum, Steel), Concrete, Cement sheet, Glass or other rigid surfaces.
- Masonry substrates like stone, marble, granite, concrete.
- Aluminum window & door, vinyl window, cladding.
- Roofing & plumbing, facade panels.
- Sanitary wares, fittings & kitchen bathroom.

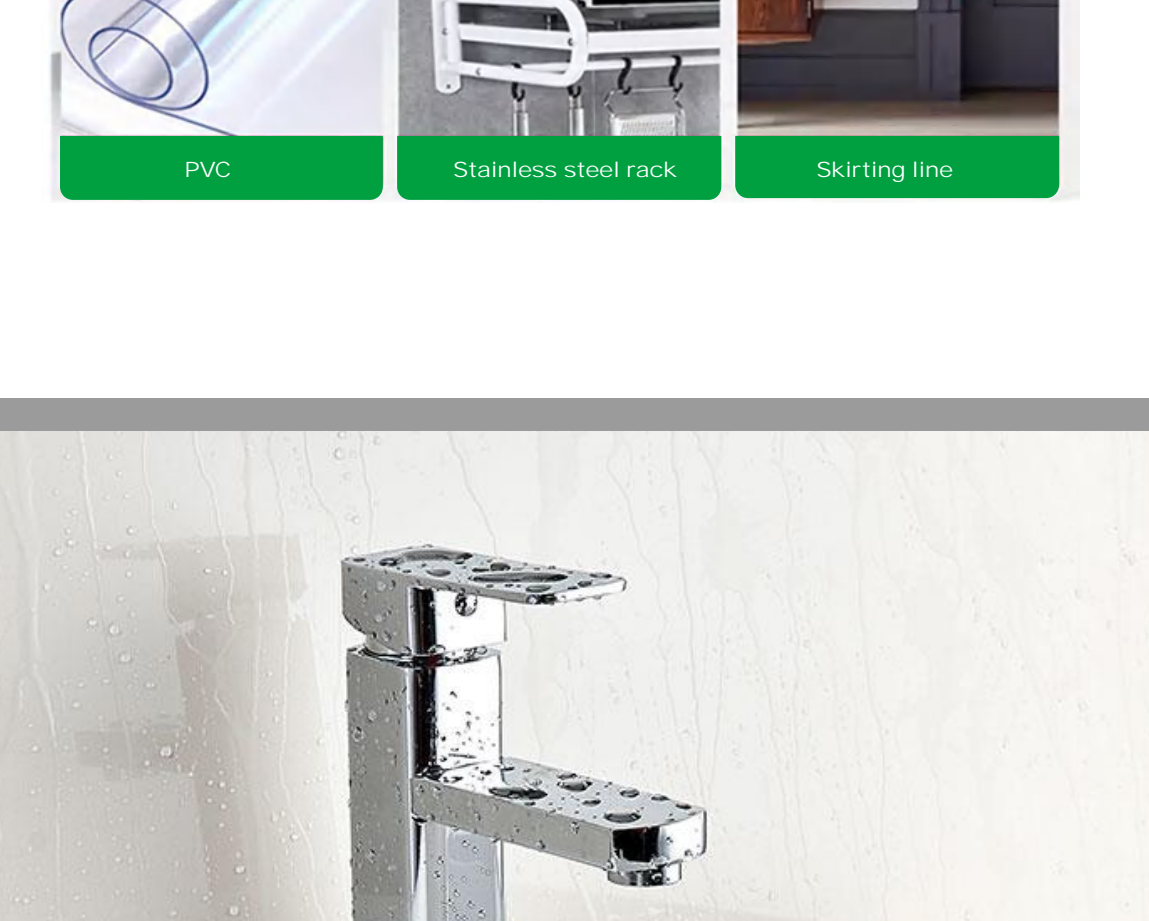

How to Use?

- Press and hold the metal shrapnel and pull off the metal rod.
- Cut the rubber head and put on the glue nozzle.
- Screw on the front cover of the glue gun.
- Start Construction.
- To make sure the surface of the substrate is clean and flat and then coat glue.
- 3 methods of coating: to the point, strip or zigzag. Picture shows zigzag method.
- Stick the substrates together.
- Finish Installation.



Silicone Sealant

Silicone Sealant

It is a one-part, neutral cure, multipurpose Sanitary Grade Silicone sealant. It has high tensile strength, high adhesive ability, and excellent adhesion to most common building substrates. After curing, it will form a cold and heat resistant, non-corrosive, flexible sealant body. Guaranteed excellent waterproof, age resistant, ultraviolet and ozone resistant ability.

Material	Silicone
Color	White, Grey, Black, OEM
Volume	300ML, 310ML, 330ML
Shelf Life	At least 12 months when store in a cool, dry place
Surface Curing	About 10 mins
Complete Curing	About 2-4 days
Features	Excellent Appearance, Strong Anti-freeze Ability, Good Elasticity
Application	Construction, Packing
Package	24 cartridges/carton

Colors




Application

- Glass, ceramics, tiles, floor glass
- Metal & steel, aluminum
- Masonry substrates like stone, marble, granite, concrete
- Aluminum window & door, vinyl window, cladding
- Roofing & plumbing, facade panels
- Sanitary wares, fittings & kitchen bathroom



Silicone Sealant Features

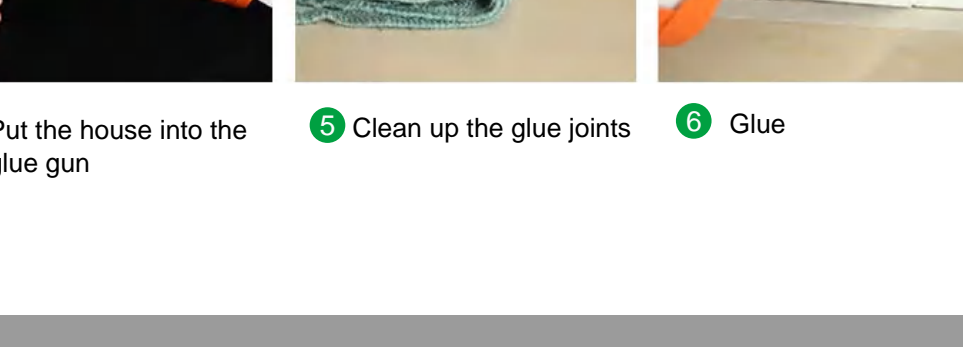

How To Use?

- Cut the seal
- Screw on the glue nozzle
- Cut the glue nozzle diagonally
- Put the house into the glue gun
- Clean up the glue joints
- Glue



Structural Silicone Sealant

Structural Silicone Sealant


Structural Silicone sealant is a one-component, permanently flexible, moisture resistant silicone sealant that is the industry standard. The product's tough chemical resistance makes it a worthy choice for a wide range of applications. Structural silicone sealant provides excellent adhesion to cultured marble, tile, glass, vinyl, aluminum, and sheet metal without the need for a primer. The product is engineered to cure rapidly when exposed to atmospheric moisture, to form a durable light bond that contractors and installers count on.

Material	Silicone
Color	White, Grey, Black, OEM
Volume	500ML
Shelf Life	At least 12 months when store in a cool, dry place
Surface Curing	About 10 mins
Complete Curing	About 2-4 days
Features	Excellent Appearance, Strong Anti-freeze Ability, Good Elasticity
Application	Construction, Packing
Package	20 tubes/carton

Colors



Application

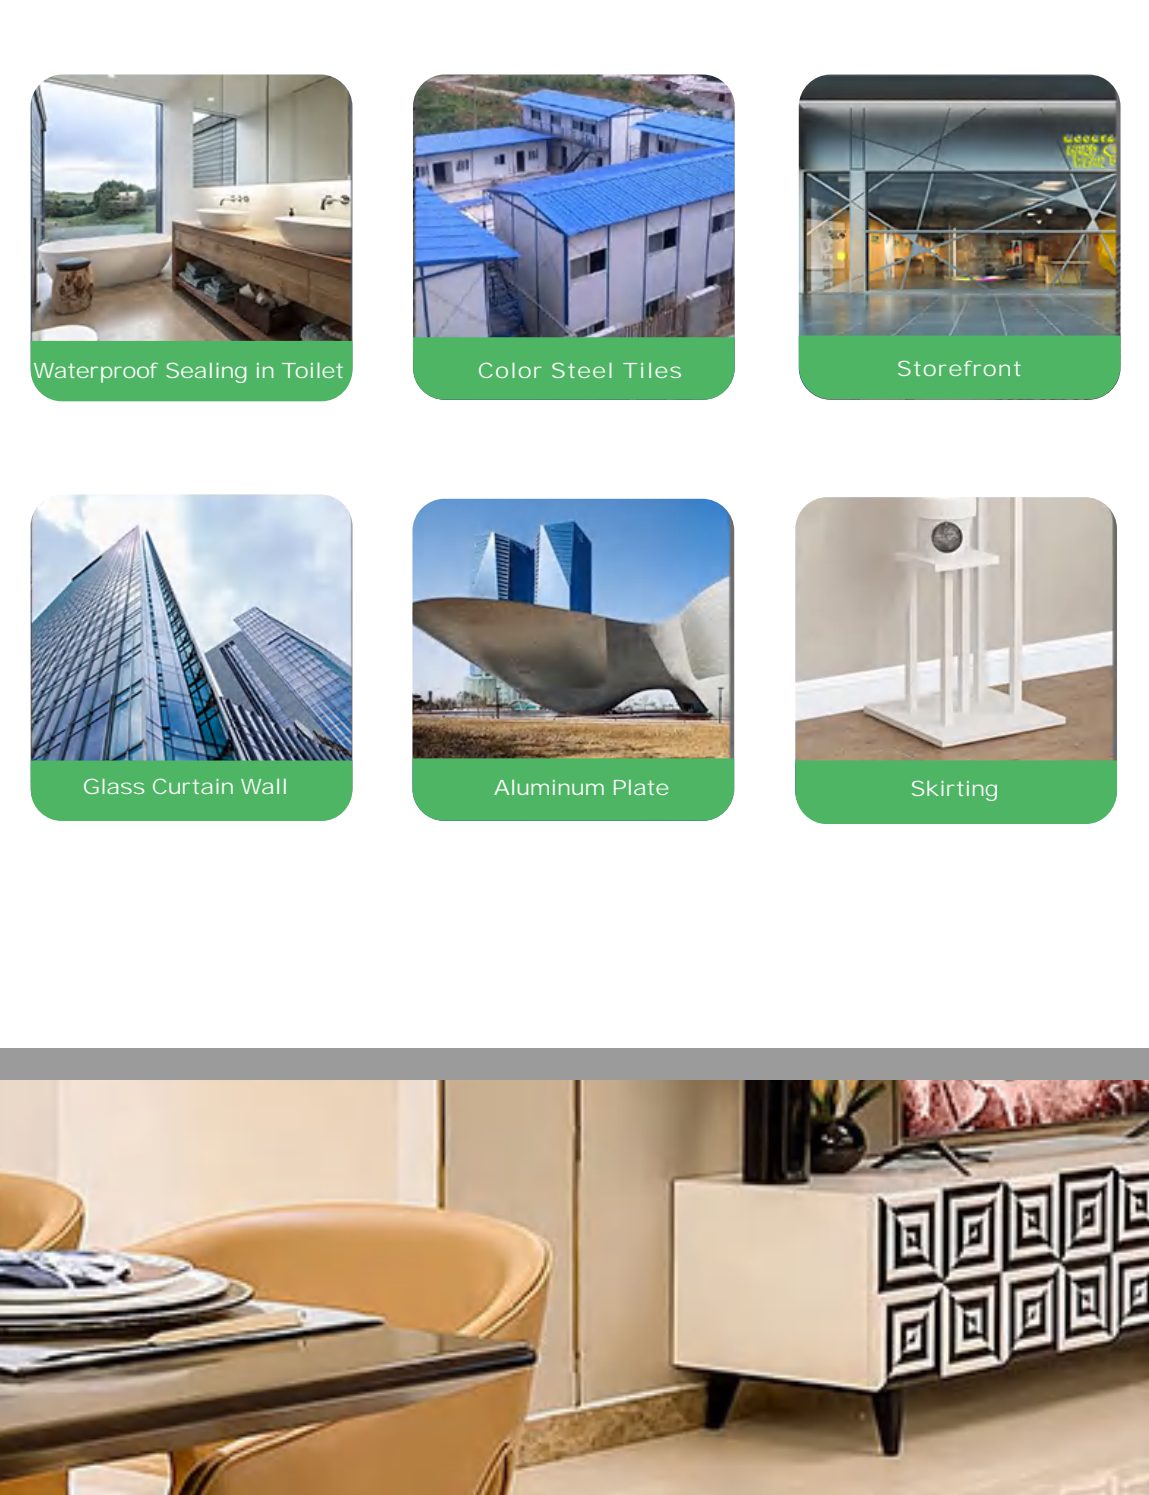

How to Use?

- Cut the nozzle
2. Hold down the iron and pull the push rod back.
3. Open the screw cap.
4. Cut structural silicon sealant and put it into the gun and put the nozzle.
5. Tighten the screw cap.
6. Start construction.




Epoxy Tile Grout

Epoxy Tile Grout

Epoxy tile grout is a double-component epoxy adhesive for ceramic tile gap filling, mainly using epoxy resin, curing agent and high grade pigments as raw material and adopting advanced technology. It shows excellent bonding, and durability, and corrosion properties with good bonding to wood, cement, steel, stone, acrylic plates etc. It is widely used for indoor decoration with various colors.

Material	Epoxy Resin & Hardener
Color	White, Silver, Golden, Grey, Brown, etc.
Volume	400ML
Shelf Life	At least 12 months when store in a cool, dry place
Curing Time	24 hours
Extrudability	1300 mm/min
Features	ECO-friendly, Non-toxic, Waterproof, Anti-mildew
Application	Tile Trimming, Tile Corner Protection, Tile Cloning, Two-way Protection, etc.
Package	20 parts/carton

Colors

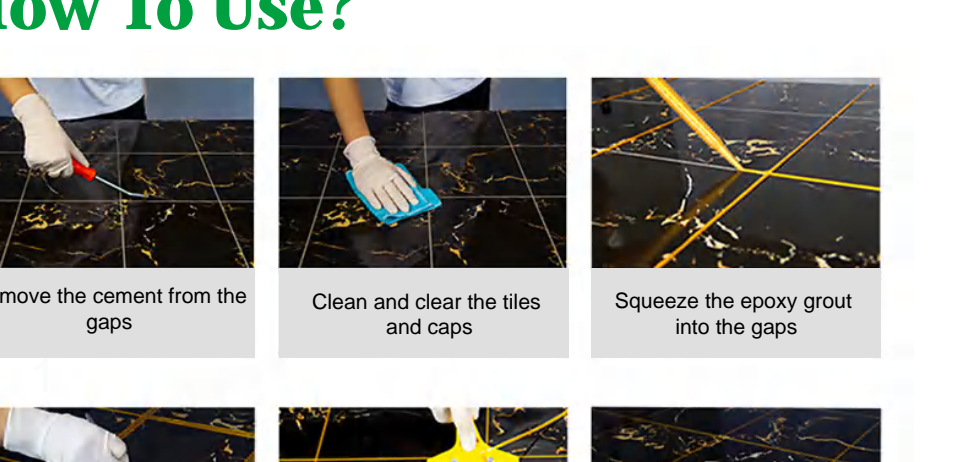


Application

- The sealing in living room, kitchen, bathroom.
- Bonding and leveling of gaps, joints, openings and corners.



Epoxy Tile Grout Features

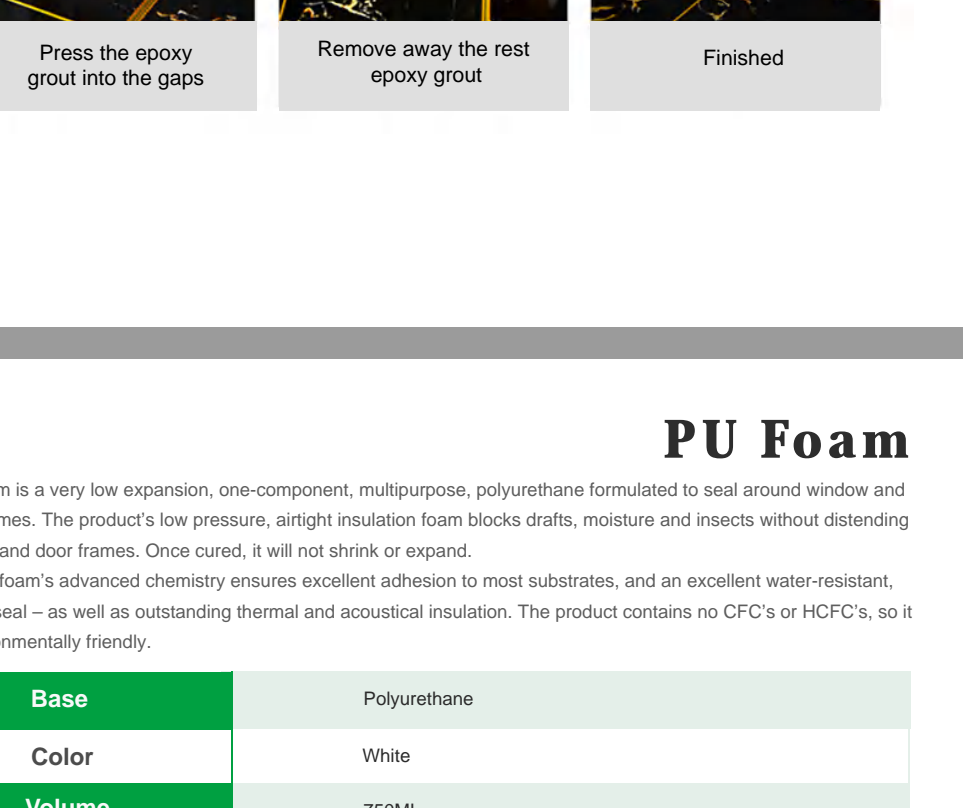

How To Use?

- Remove the cement from the gaps
- Clean and clear the tiles and gaps
- Squeeze the epoxy into the gaps
- Press the epoxy grout into the gaps
- Remove away the rest epoxy grout
- Finished



PU Foam

PU Foam

PU Foam is a very low expansion, one-component, multipurpose, polyurethane formulated to seal around window and door frames. The product's low pressure, airtight insulation foam blocks drafts, moisture, and insects without disturbing window and door frames. Once cured, it will not shrink or expand.
Our PU foam's advanced chemistry ensures excellent adhesion to most substrates, and an excellent water-resistant, anti-UV seal – as well as outstanding thermal and acoustical insulation. The product contains no CFC's or HCFC's, so it is environmentally friendly.


Base	Polyurethane
Color	White
Volume	750ML
Shelf Life	At least 12 months when store in a cool, dry place.
Consistency	Stable Foam
Curing System	Moisture-cure
Tack-Free Time(min)	5-15
Cellular Structure	70-80% closed cells
Yield (L/900g-gw/750ml)	52-57
Shrink	None
Application Temperature Range	-5°C~+35°C
Temperature Resistance	-40°C~+80°C
Package	15 cartridges/carton

Colors




Application

- Excellent adhesion on most substrates
- Insulation, sealing and insulating of door and window frames
- Filling and leveling of gaps, joints, openings and corners
- Bonding and mouting
- Insulating the electrical cables and water pipes
- Heat preservation, cold and sound insulation

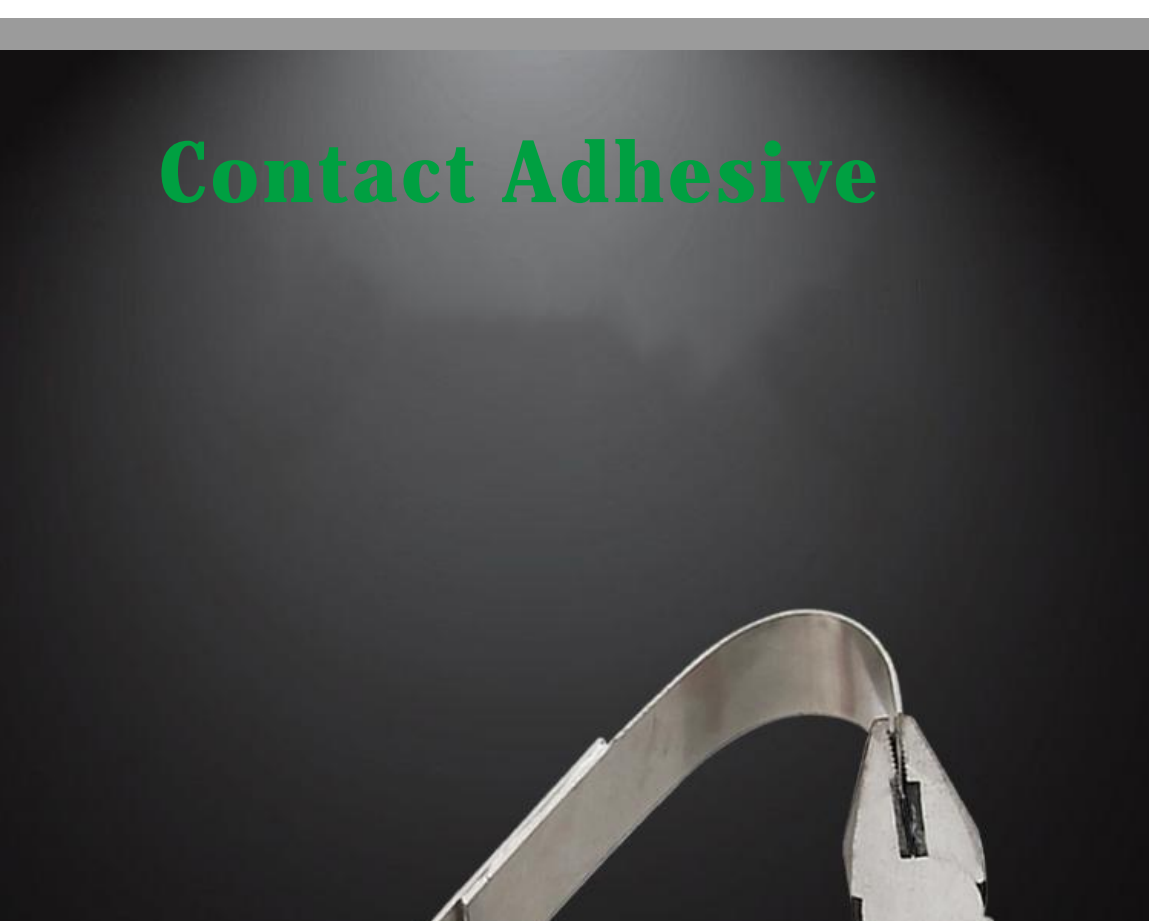

PU Foam Features

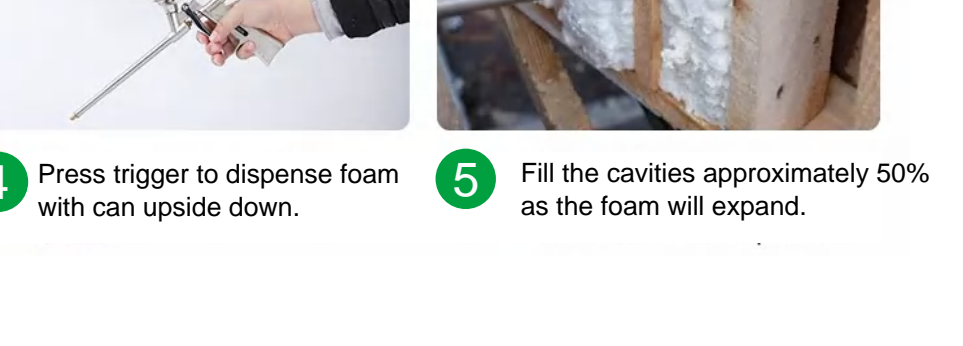

How to Use?

- Preparation
- Open the bottle cap
- Install the PU foam gun
- Press trigger to dispense foam with can upside down.
- Fill the cavities approximately 50% as the foam will expand.




Contact Adhesive

Contact Adhesive

Contact adhesive is a superior all-purpose Polybutadiene rubber-based contact adhesive with high immediate bond strength, good durability, water and heat resistance.
It can bond instantly on contact to a variety of surfaces without taping or sustained pressure and is suitable for interior and exterior applications.


Material	Solvent-based synthetic rubber
Color	Light Yellow
Volume	100ML, 250ML, 650ML, 1L, 3.6L
Shelf Life	At least 12 months when store in a cool, dry place
Solid Content	25±2
Viscosity (25 °C)	300-400 mpa.s
Gravity	0.88-0.90
Heat Resistance	97±1°C
Features	Excellent initial grab, High immediate bond strength, Quick drying, Wide Application, Good durability, Good heat resistance, Good water resistance, exterior architecture, interior decoration, home furniture-made and repairing, etc.
Application	Interior architecture, interior decoration, home furniture-made and repairing, etc.
Package	100ML: 100 cartridges; 250ML: 24 cartridges; 650ML: 12 cartridges; 1 Liter: 12 cartridges; 3.6 Liter: 6 cartridges

Colors

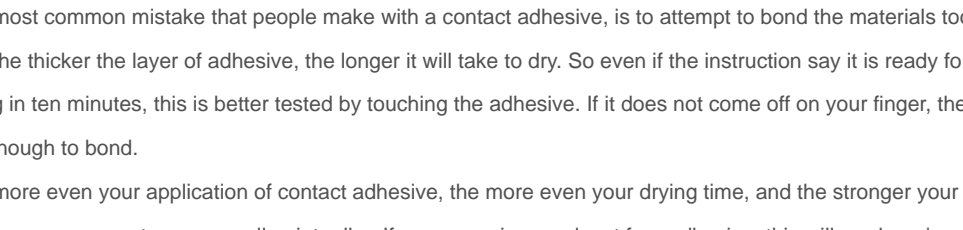


Application

- General purpose applications in the light industry, furniture, and construction industry.
- Handicrafts, shoe repair, leather work and decorative work.
- Bonding of fabrics, rubber, cork, leather, thermoplastic polyurethane foam, EVA in wood, metal or concrete.
- Floor and carpet installation.

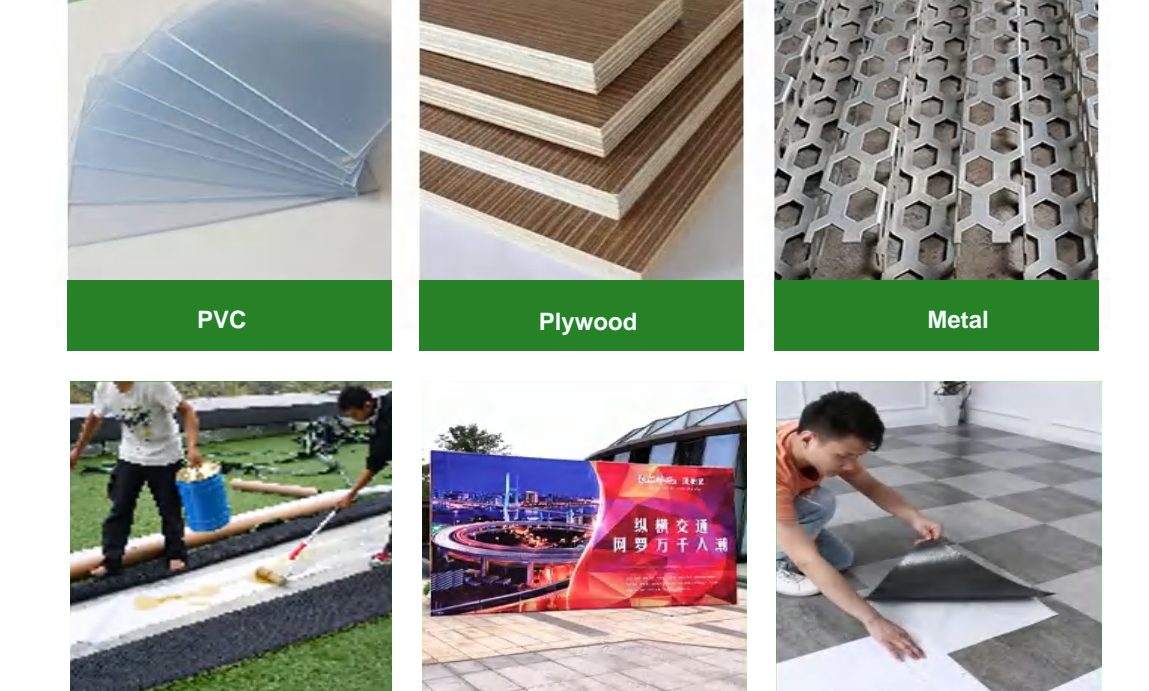

Contact Adhesive Features

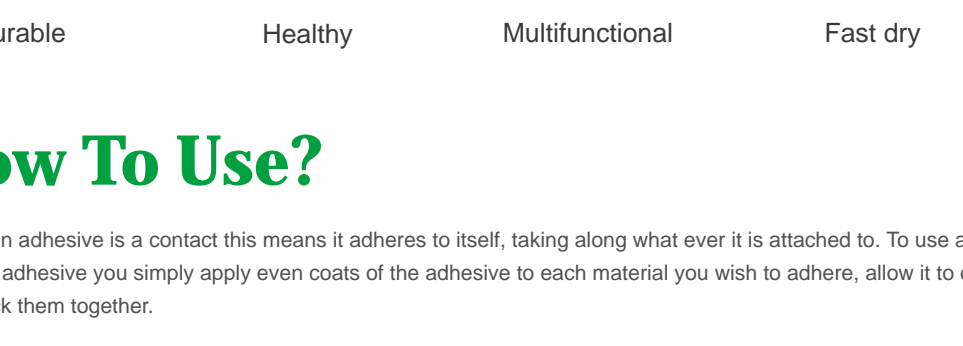

How To Use?

- When an adhesive is a contact this means it adheres to itself, taking along whatever it is attached to. To use a contact adhesive you simply apply even coats of the adhesive to each material you wish to adhere, allow it to dry, and stick them together.
- Tips on using a contact adhesive:
- If the material you are bonding is porous, apply two coats of adhesive, allowing it to dry in between.
 - Even if the instructions say you may wait up to 24 hours before bonding, if your environment is dusty (which most are), this will reduce the strength of your bond. It is best to bond materials within two hours of applying the adhesive.
 - The most common mistake that people make with a contact adhesive, is to attempt to bond the materials too soon. The thicker the layer of adhesive, the longer it will take to dry. So even if the instruction say it is ready for bonding in ten minutes, this is better tested by touching the adhesive. If it does not come off on your finger, then it is dry enough to bond.
 - For the even your application of contact adhesive, the more even your drying time, and the stronger your bond. For an even coat, use a small paint roller. If you are using a solvent free adhesive, this will wash up in soap and water. For a solvent based adhesive, it is easier and less harmful on the environment to throw the roller out with use, than to use enough of the appropriate solvent to clean your roller. Also, a foam brush gives a fairly even coat as well.